

MONO MODULE **N** TYPE**575W-595W**Premium Quality *Bifacial Dual Glass***132 CELL**

MONO N-TYPE

23.03%

MAXIMUM EFFICIENCY

0 to +5W

POSITIVE POWER TOLERANCE



Higher Output of Power



For Environment For Future



Optimize the Temperature Coefficient



Reduce Equipment & Material Cost




Module Type		WE-66M575HM10X-BD		WE-66M580HM10X-BD		WE-66M585HM10X-BD		WE-66M590HM10X-BD		WE-66M595HM10X-BD	
		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Test Environment		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power	$P_{MAX}(W)$	575	438	580	442	585	445	590	449	595	453
Maximum Power Voltage	$V_{MPP}(V)$	40.20	37.99	40.40	38.19	40.60	38.39	40.80	38.59	41.00	38.79
Maximum Power Current	$I_{MPP}(A)$	14.32	11.49	14.37	11.52	14.42	11.55	14.47	11.58	14.52	11.61
Open Circuit Voltage	$V_{OC}(V)$	47.98	46.40	48.18	46.60	48.38	46.80	48.58	47.00	48.78	47.20
Short Circuit Current	$I_{SC}(A)$	15.17	12.24	15.22	12.28	15.27	12.32	15.32	12.36	15.37	12.40
Tolerance	(W)	0 - +5		0 - +5		0 - +5		0 - +5		0 - +5	
Module Efficiency	(%)	22.26		22.45		22.65		22.84		23.03	

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3. Average efficiency reduction of 4.5% at 200W/m² according to EN 60904-1
 NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

BIFACIAL OUTPUT-REAR SIDE POWER GAIN 10% FOR REFERENCE



Module Type	WE-66M575HM10X-BD	WE-66M580HM10X-BD	WE-66M585HM10X-BD	WE-66M590HM10X-BD	WE-66M595HM10X-BD
Pmax (W)	632.5	638	643.5	649	654.5
Voc (V)	47.98	48.18	48.38	48.58	48.78
Isc (A)	16.62	16.68	16.74	16.80	16.86
Vmp (V)	40.20	40.40	40.60	40.80	41.00
Imp (A)	15.73	15.79	15.85	15.91	15.96

DIMENSIONS OF PV MODULE

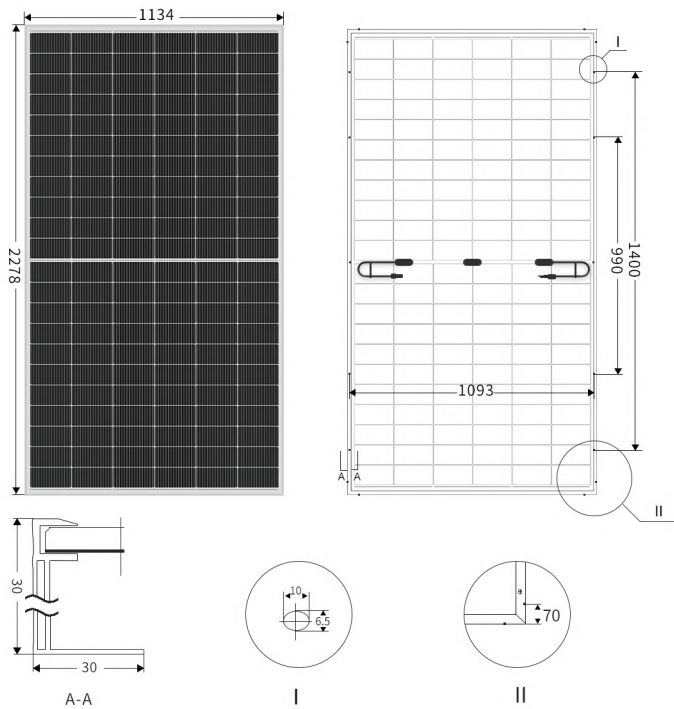

LINEAR PERFORMANCE WARRANTY

15 Year Product Warranty 30 Year Linear Power Warranty

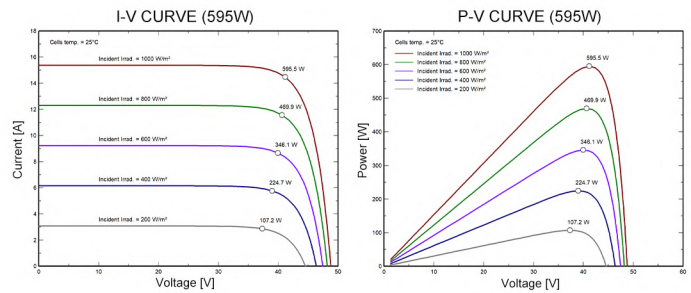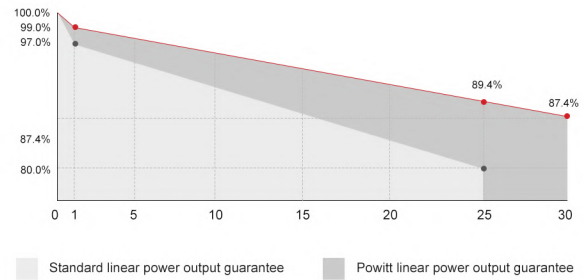

MECHANICAL DATA

Cell Type	Mono N-TYPE
No. of Cells	132 (6 x 22)
Module Dimensions	2278 x 1134 x 30mm
Weight	31.8kg
Front Glass	2.0mm
Back Glass	2.0mm
Frame	Anodized Aluminium Alloy
Junction Box	IP 68 Rated
Cables	4.0mm ² , 350mm or Customized Length
Connector	MC4 Compatible

TEMPERATURE RATINGS

Nominal Operating Cell Temperature(NOCT)	41±3°C
Temperature Coefficient of P _{MAX}	-0.29%/°C
Temperature Coefficient of V _{OC}	-0.25%/°C
Temperature Coefficient of I _{SC}	+0.05%/°C

MAXIMUM RATINGS

Operational Temperature	-40°C to +85°C
Maximum System Voltage	1500V DC
Max Series Fuse Rating	35A
Mechanical Load	5400pa
Wind Load	2400pa

PACKAGING CONFIGURATION 37 pcs/Pallet, 740 pcs/40'HQ

All rights reserved. Specifications included in this datasheet are subject to change without notice.



ECO SOLAR CO., LTD
 Address: 62, Lam Thi Ho Street, Tan Chanh Hiep Ward, District 12, Ho Chi Minh City, Vietnam
 Tel: +84 909 296 297 web: www.worldenergy.vn E-mail: congtyecosolar@gmail.com